



E3-E4 CFA Router Configuration

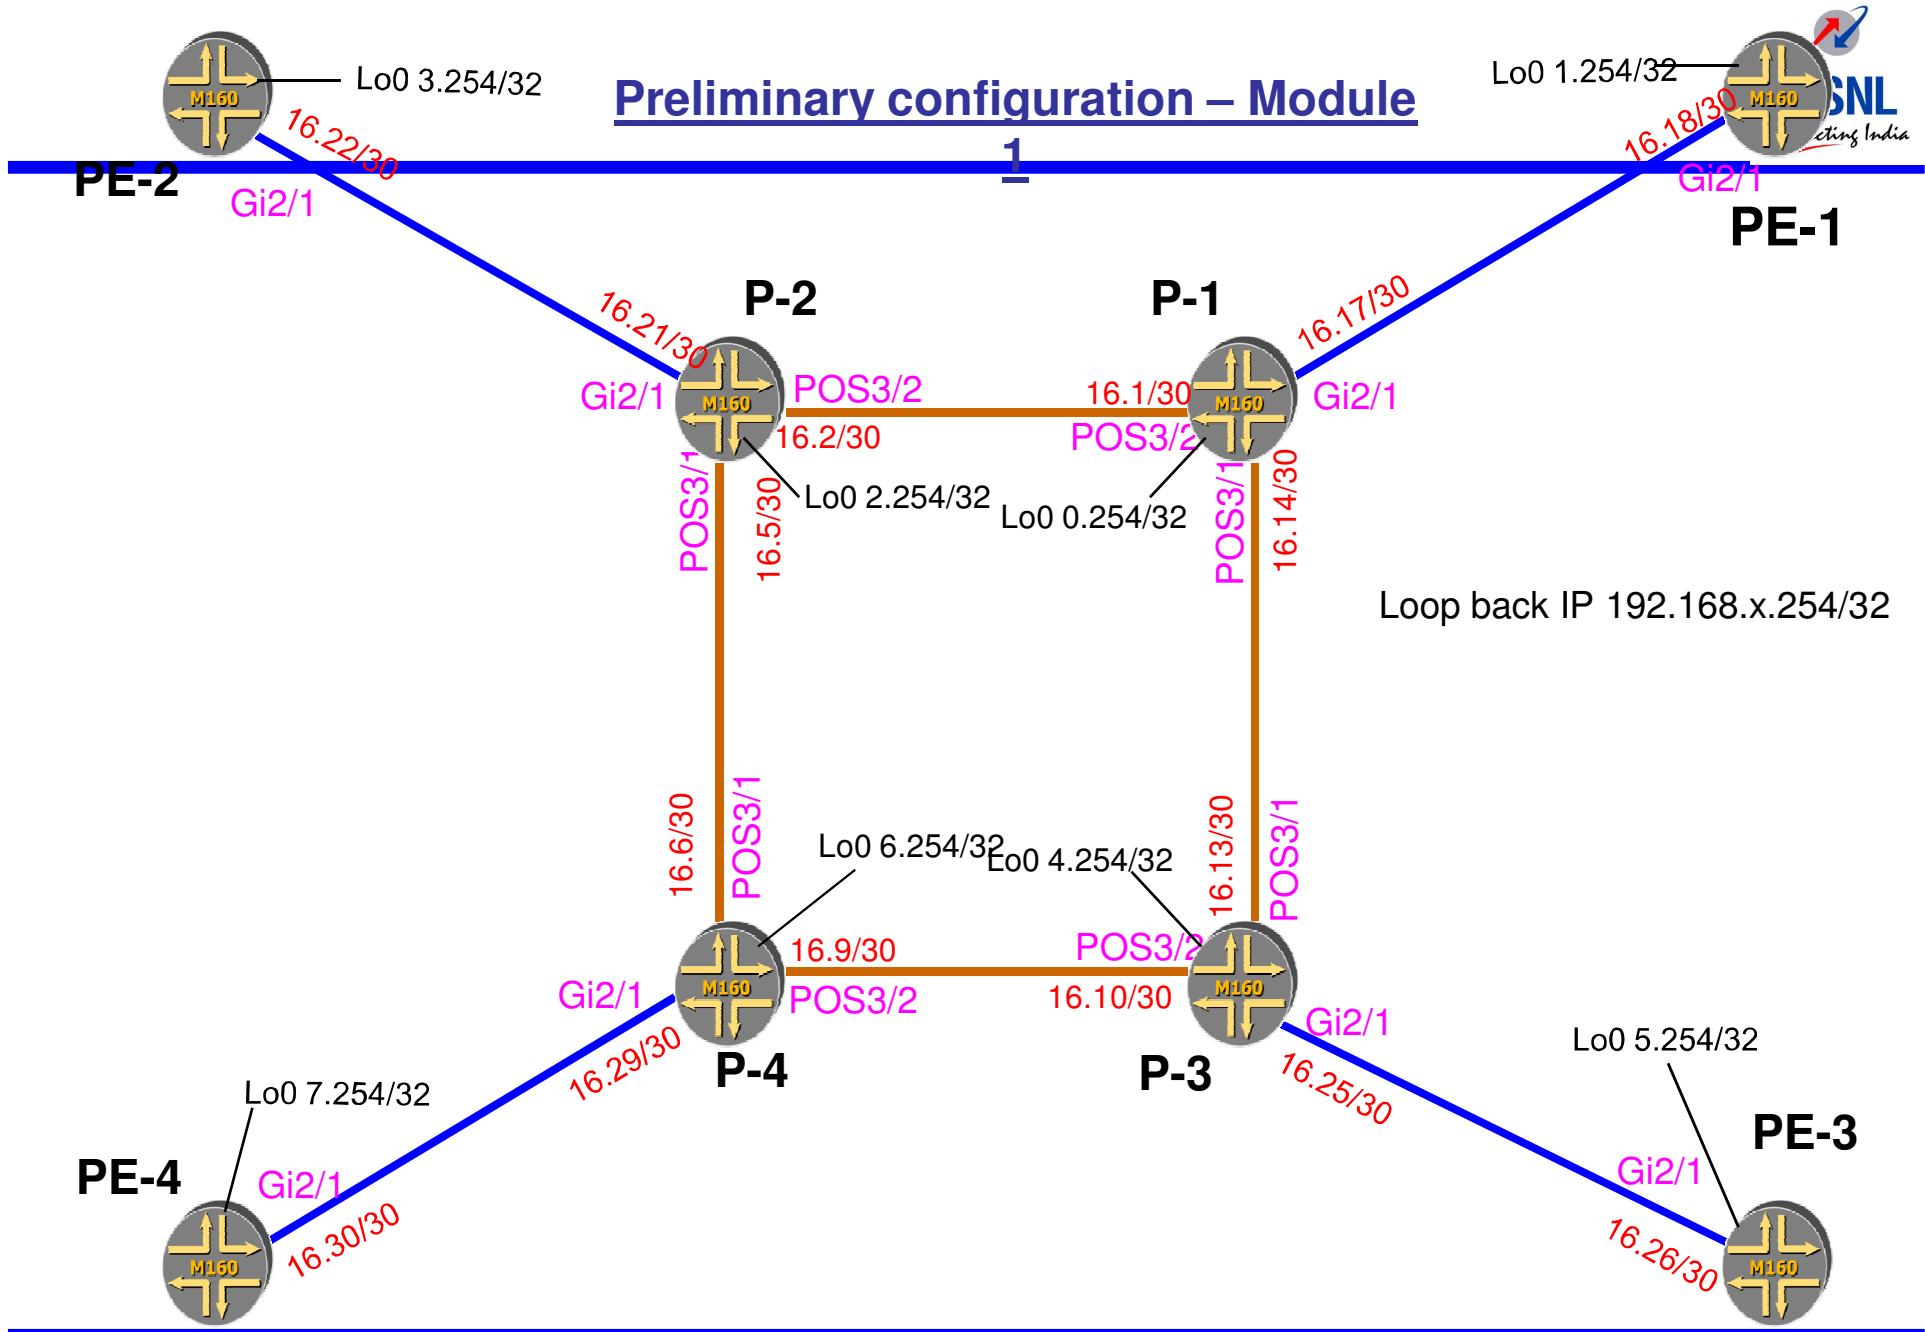


For internal circulation of BSNL only

Static/Default Routing – Module-2

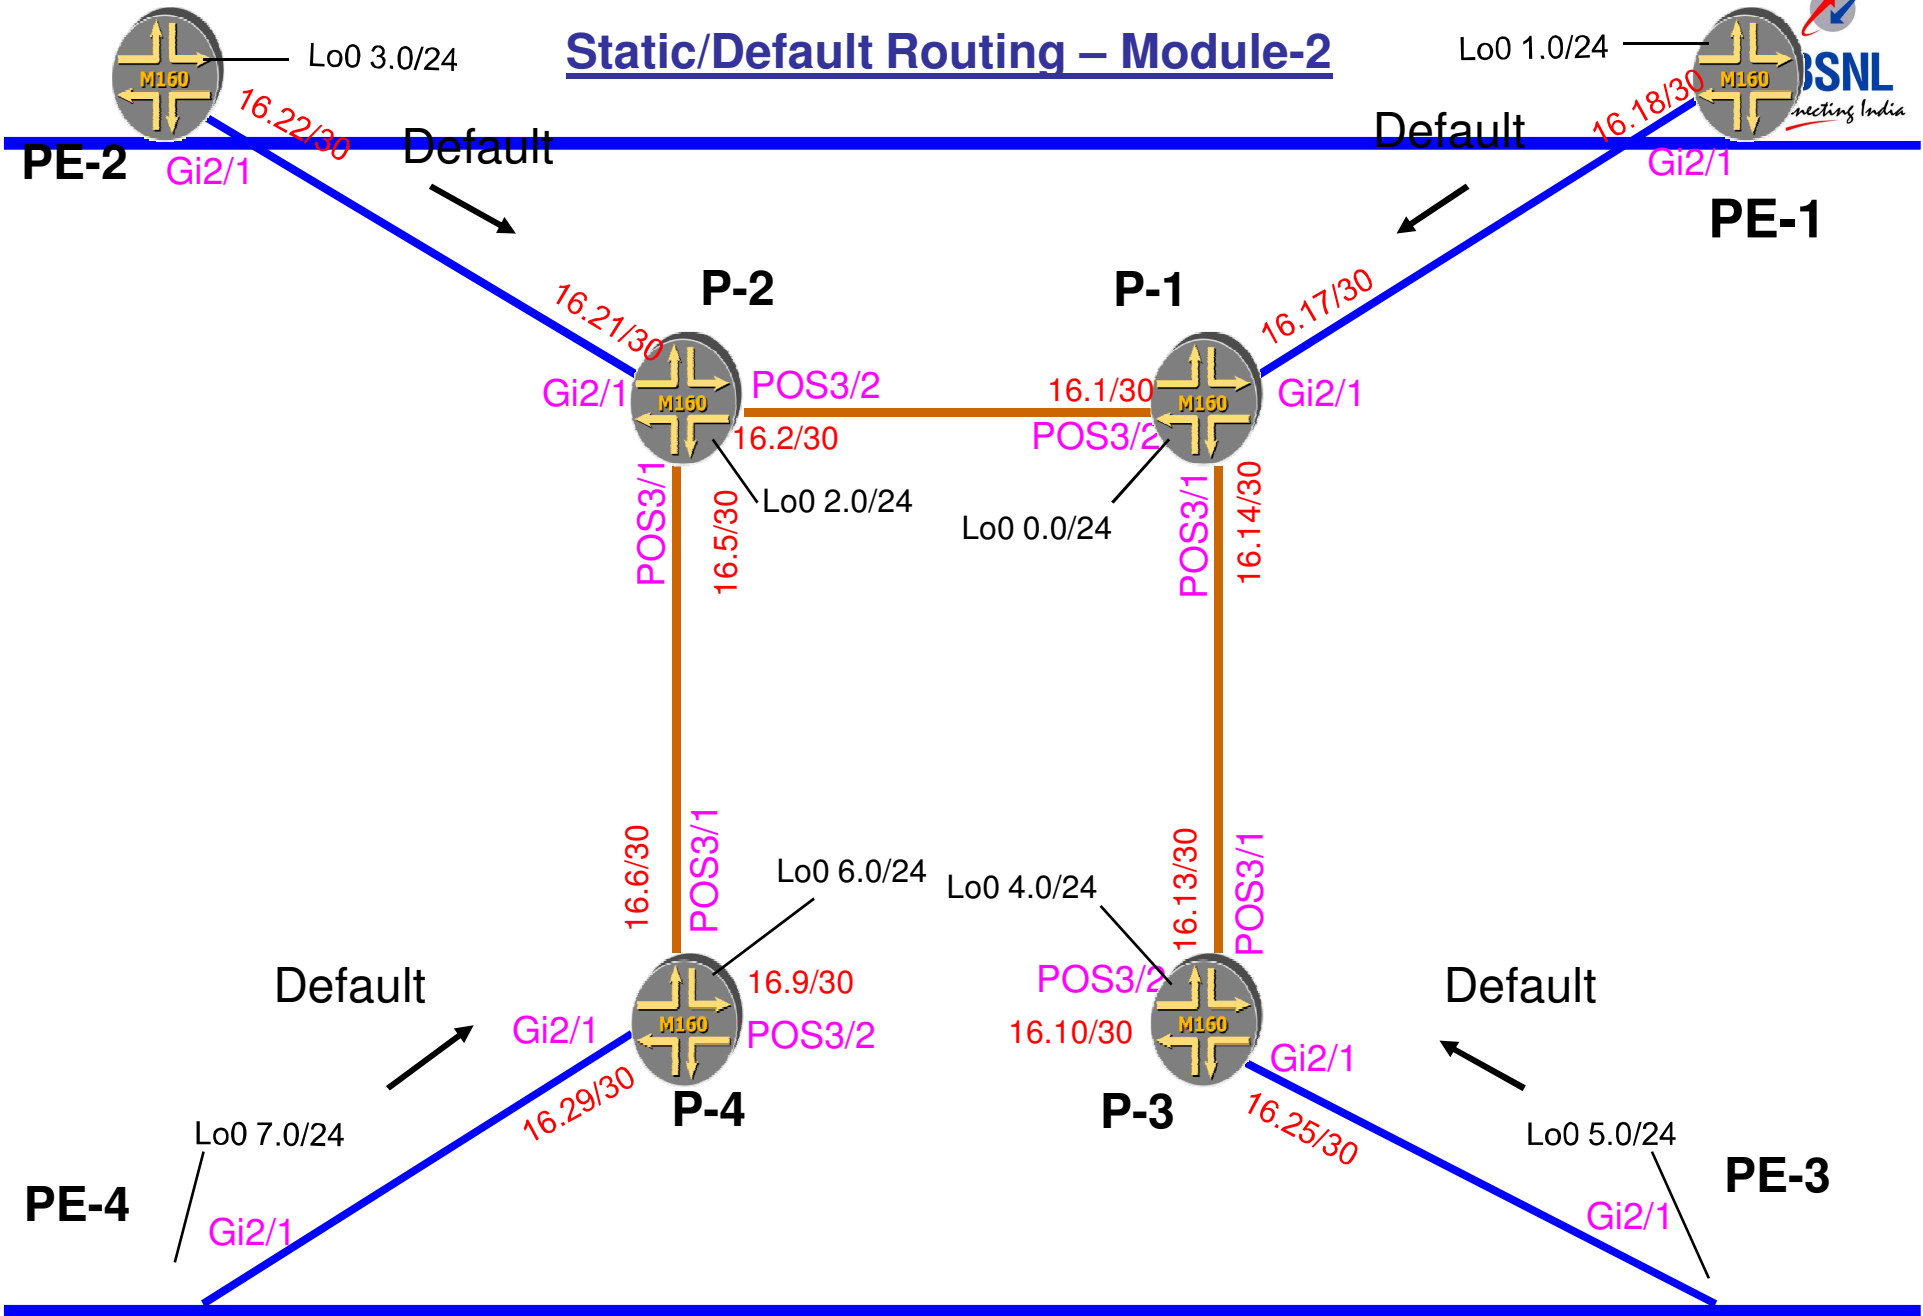


For internal circulation of BSNL only

Basic OSPF Lab- (Multi Area)- Module-3

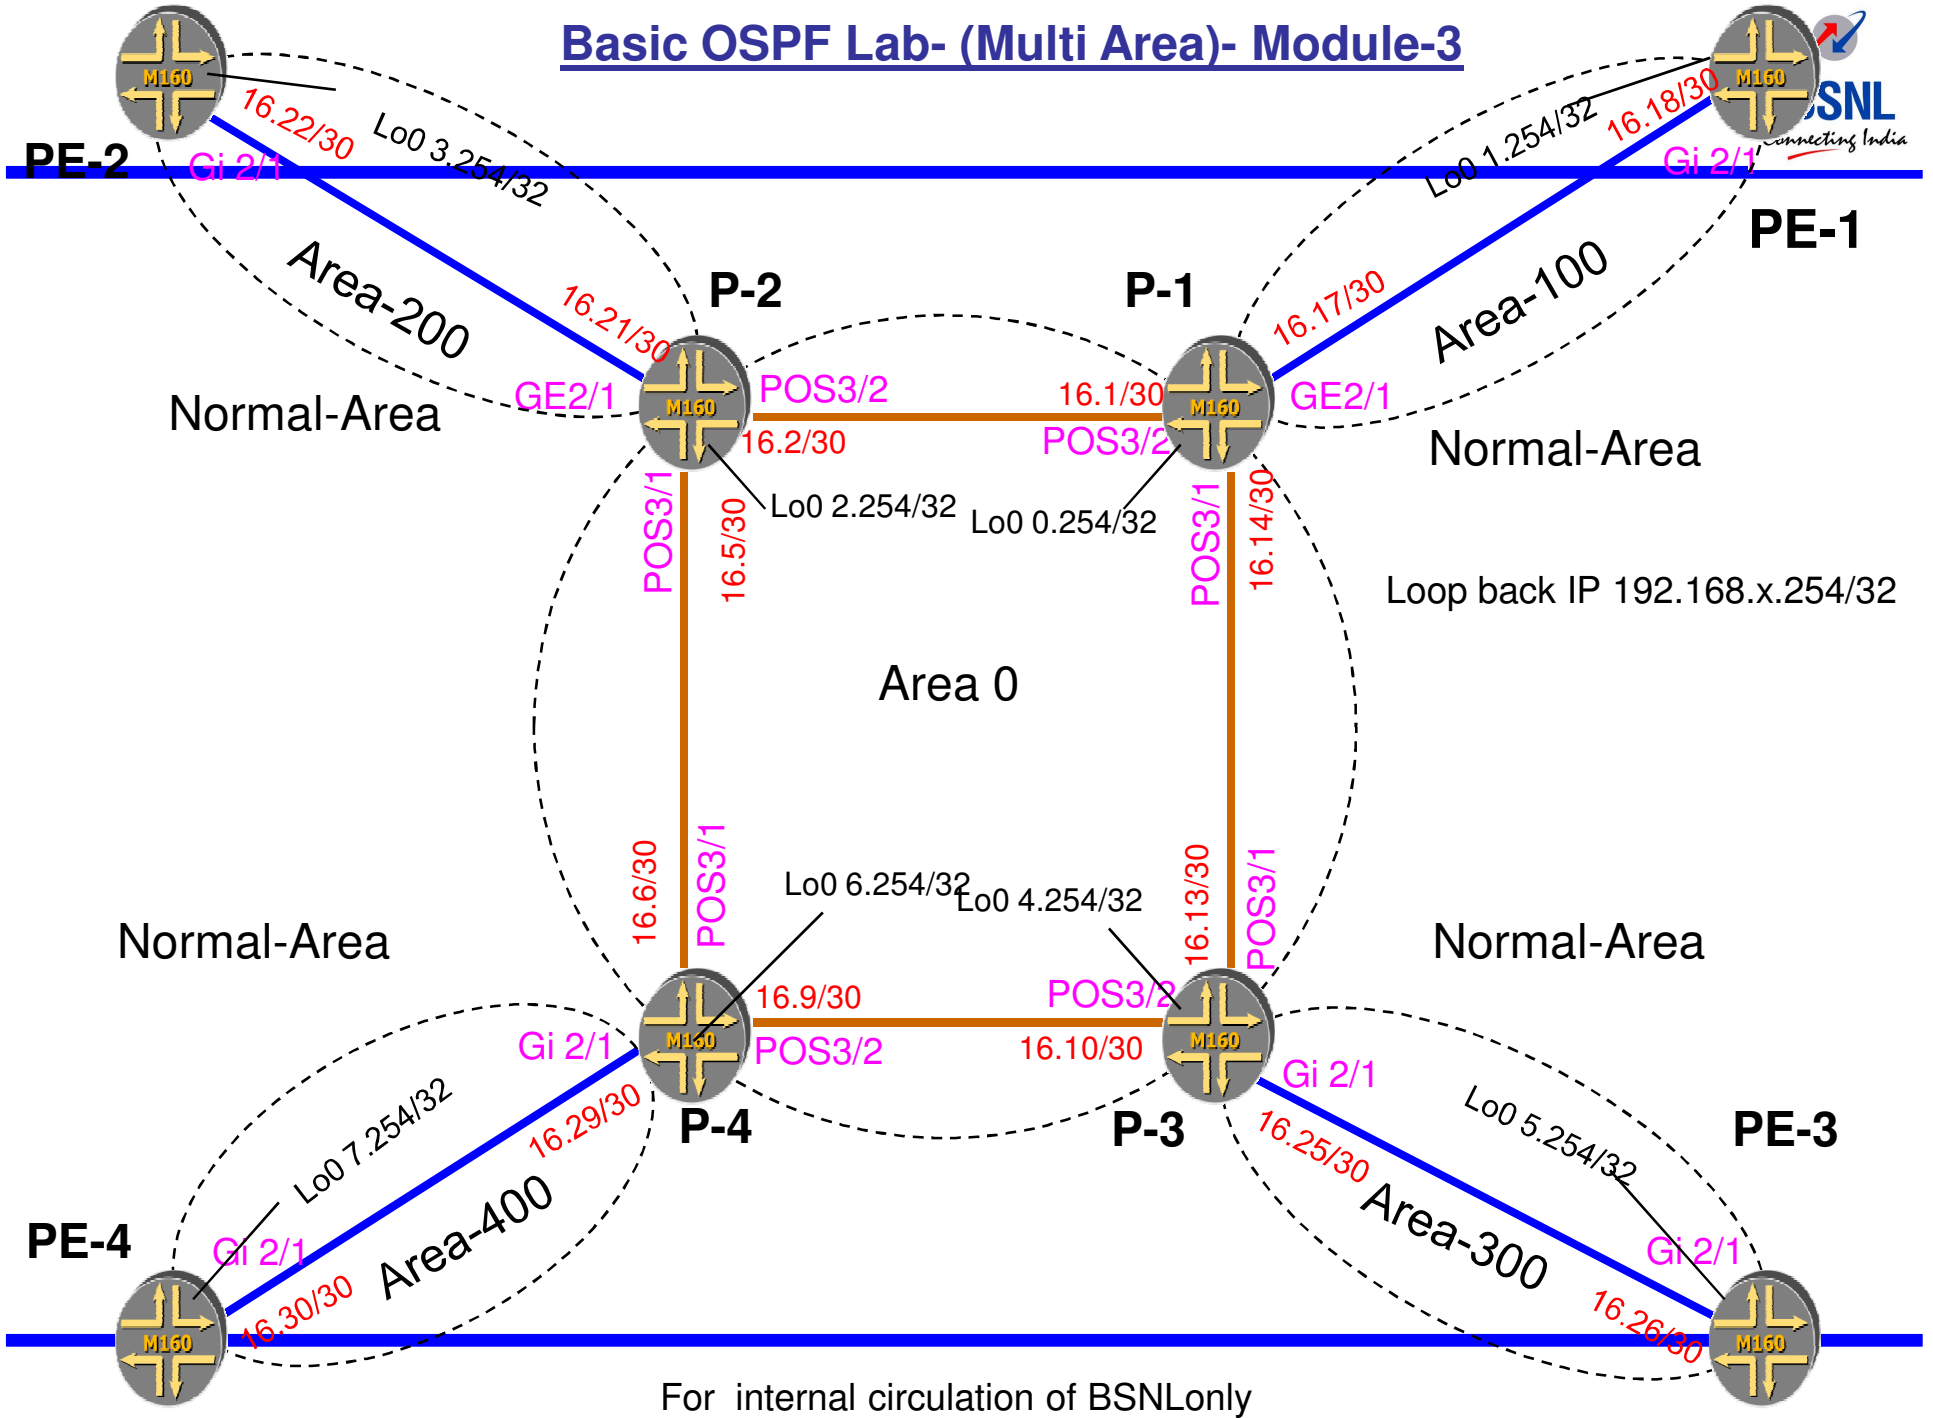


Basic OSPF Lab- (Multi Area)- Module-3

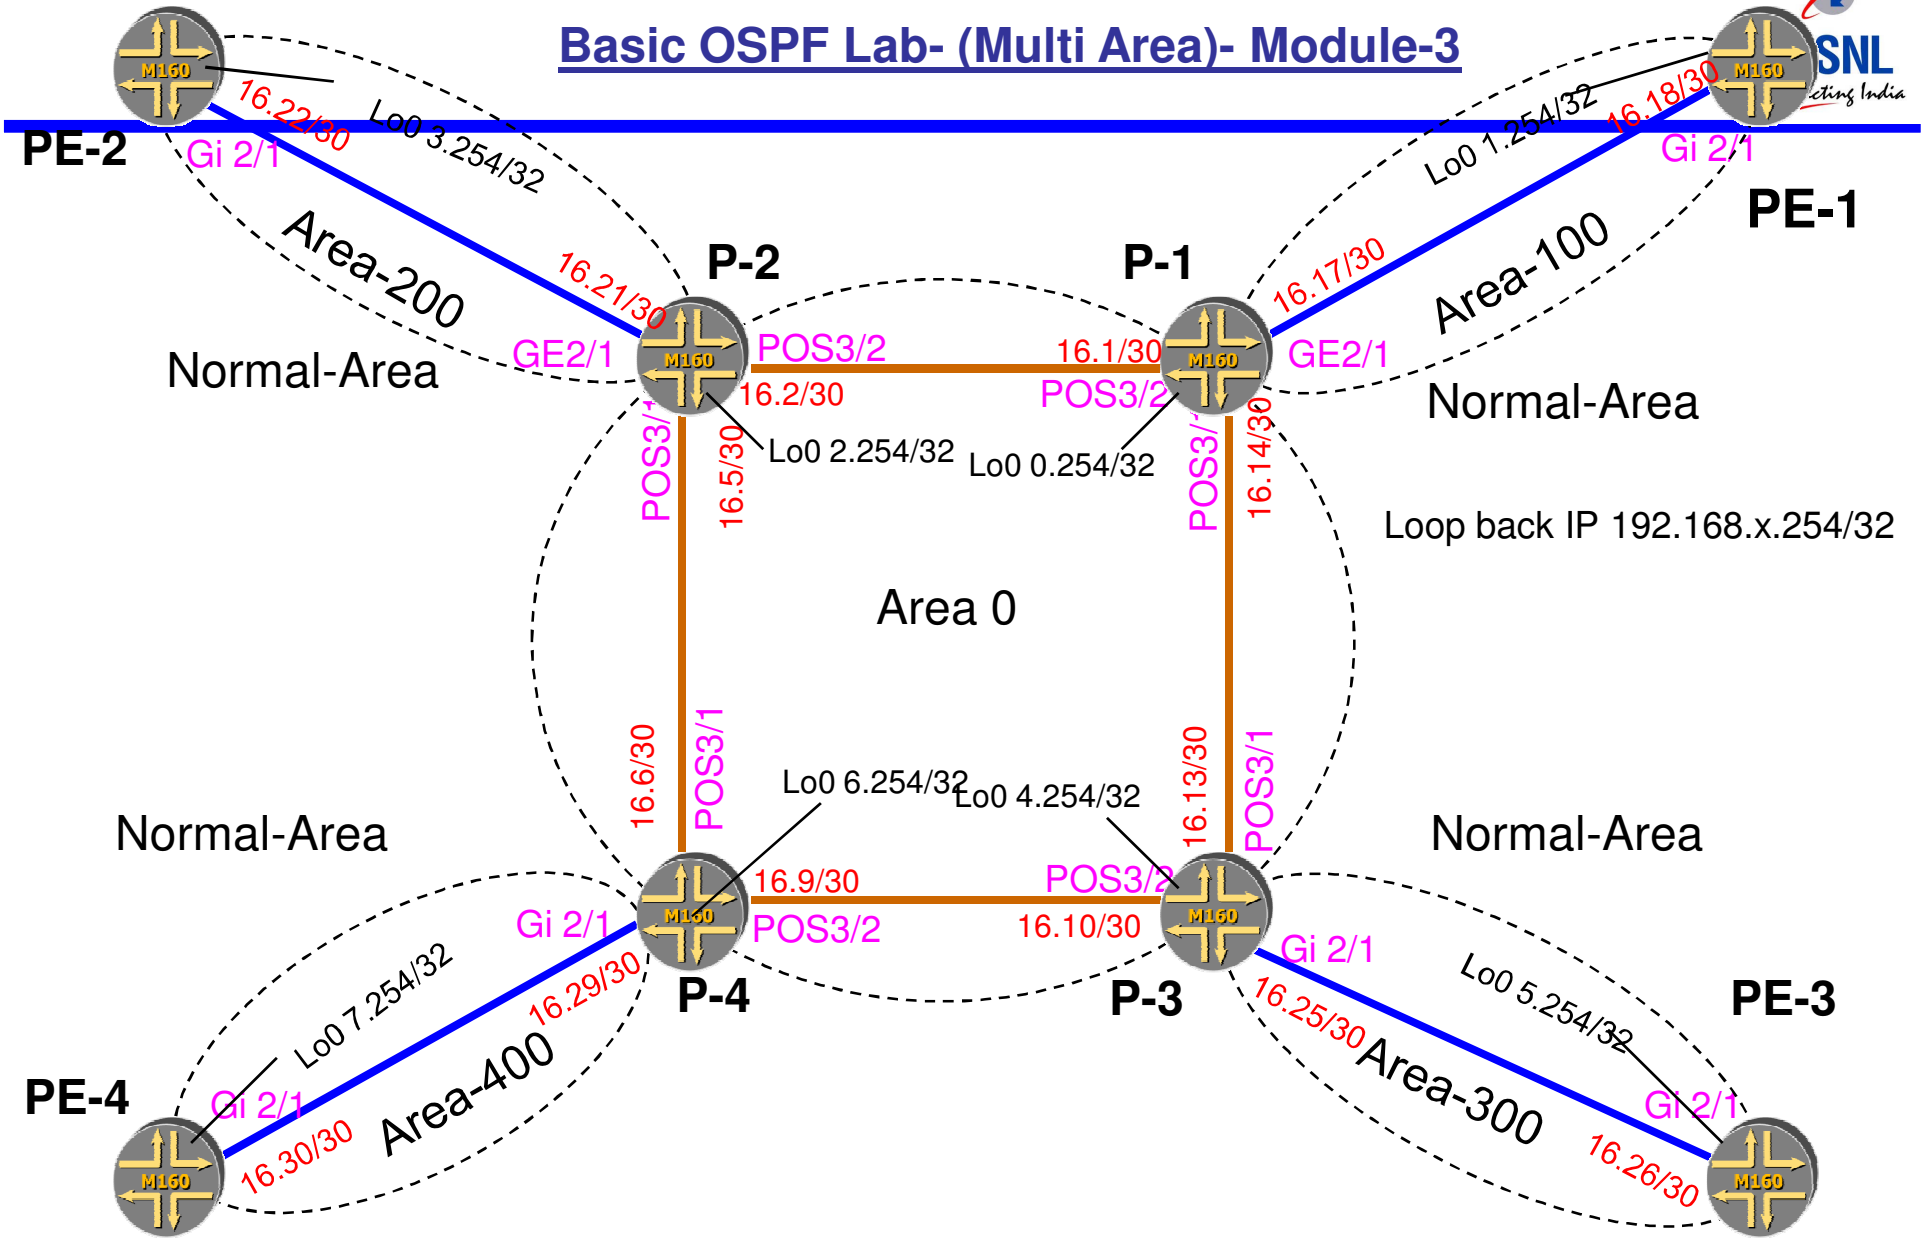

Loop back IP 192.168.x.254/32

For internal circulation of BSNL only

Basic Topology for MPLS – Module-4

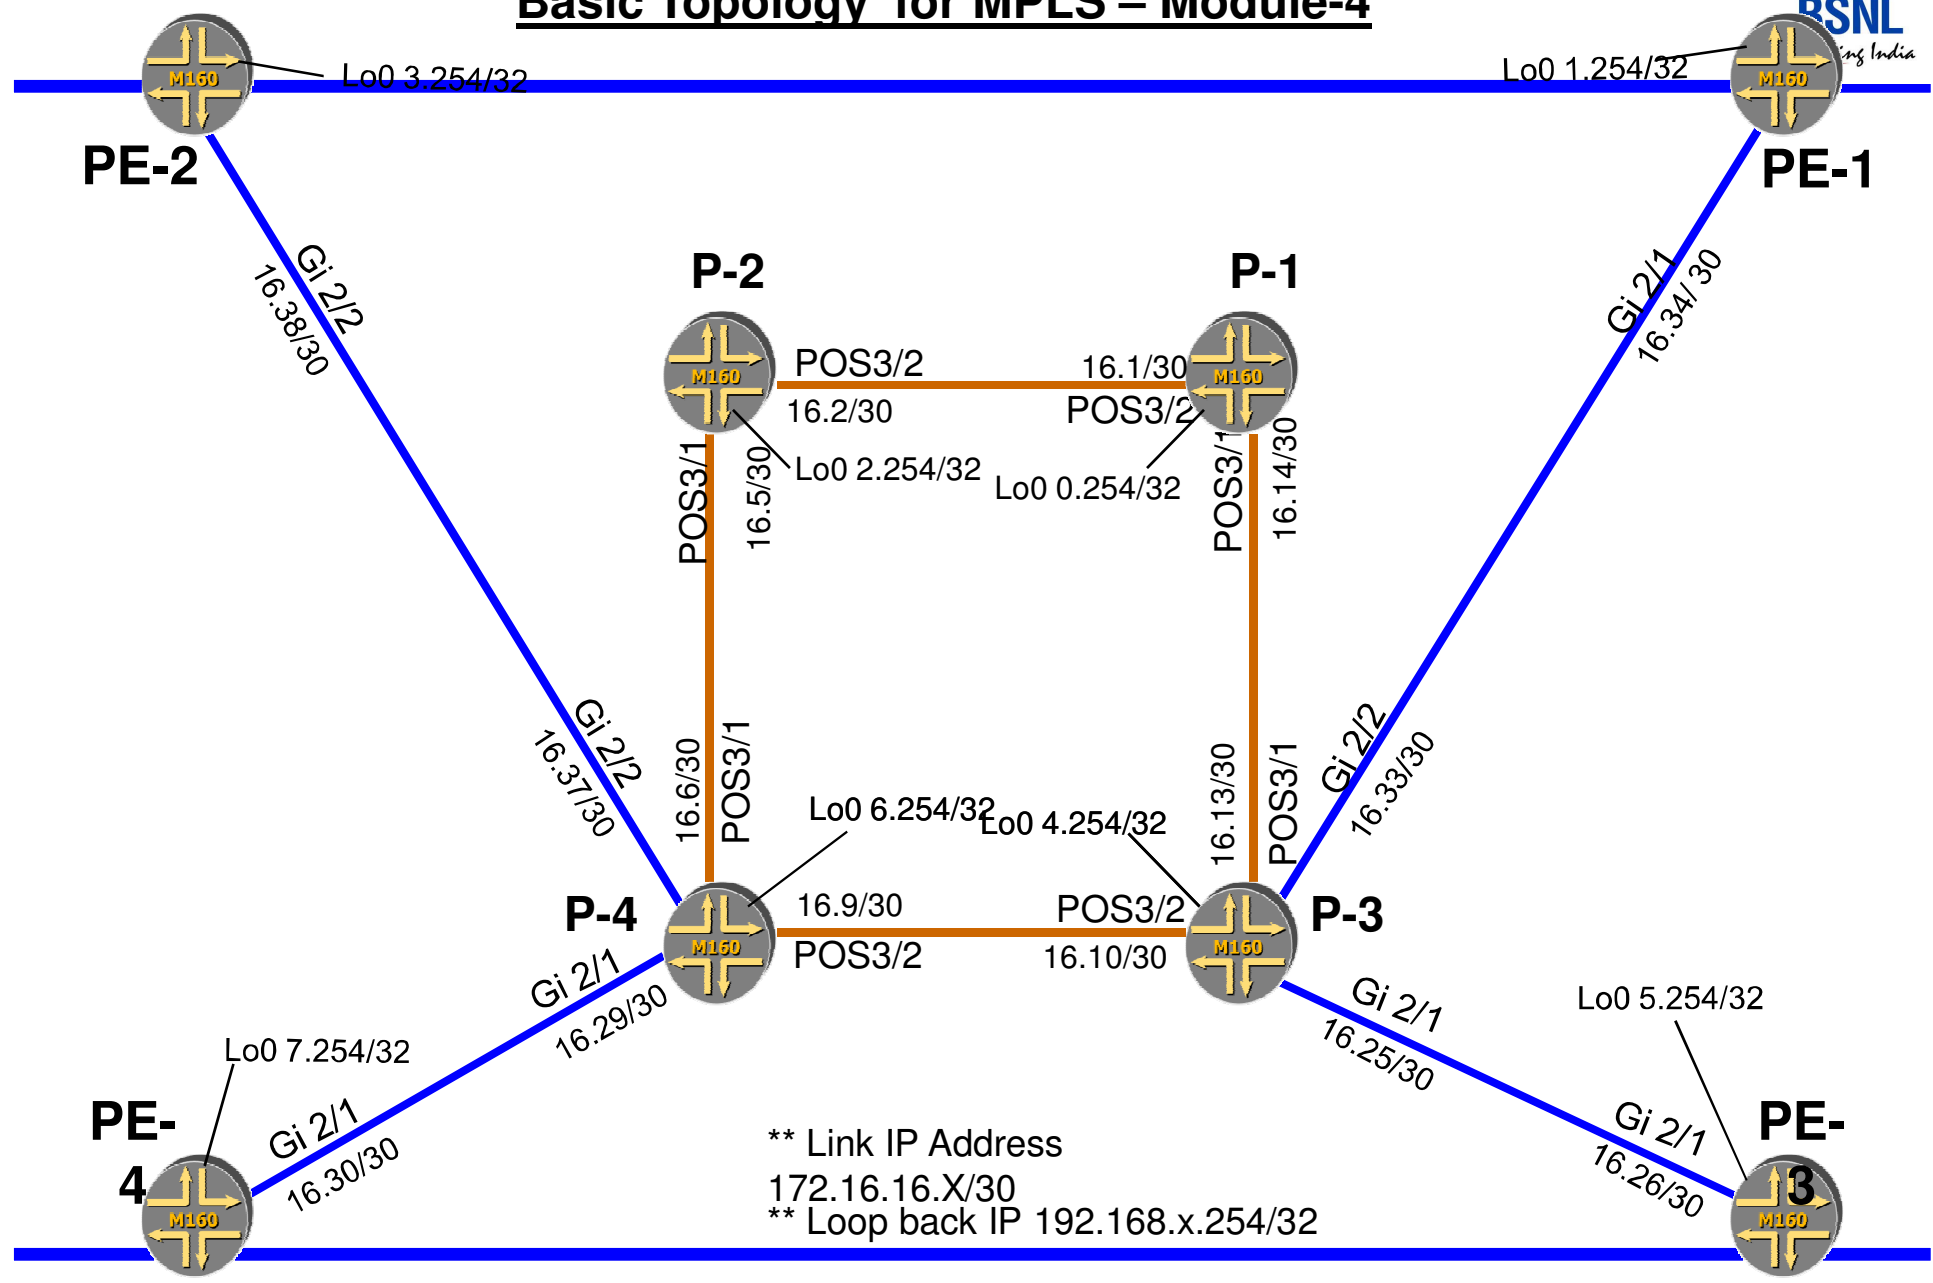


** Link IP Address
172.16.16.X/30
** Loop back IP 192.168.x.254/32

For internal circulation of BSNL only

Basic MPLS Lab using LDP- Module-5

OSPF- Area 0

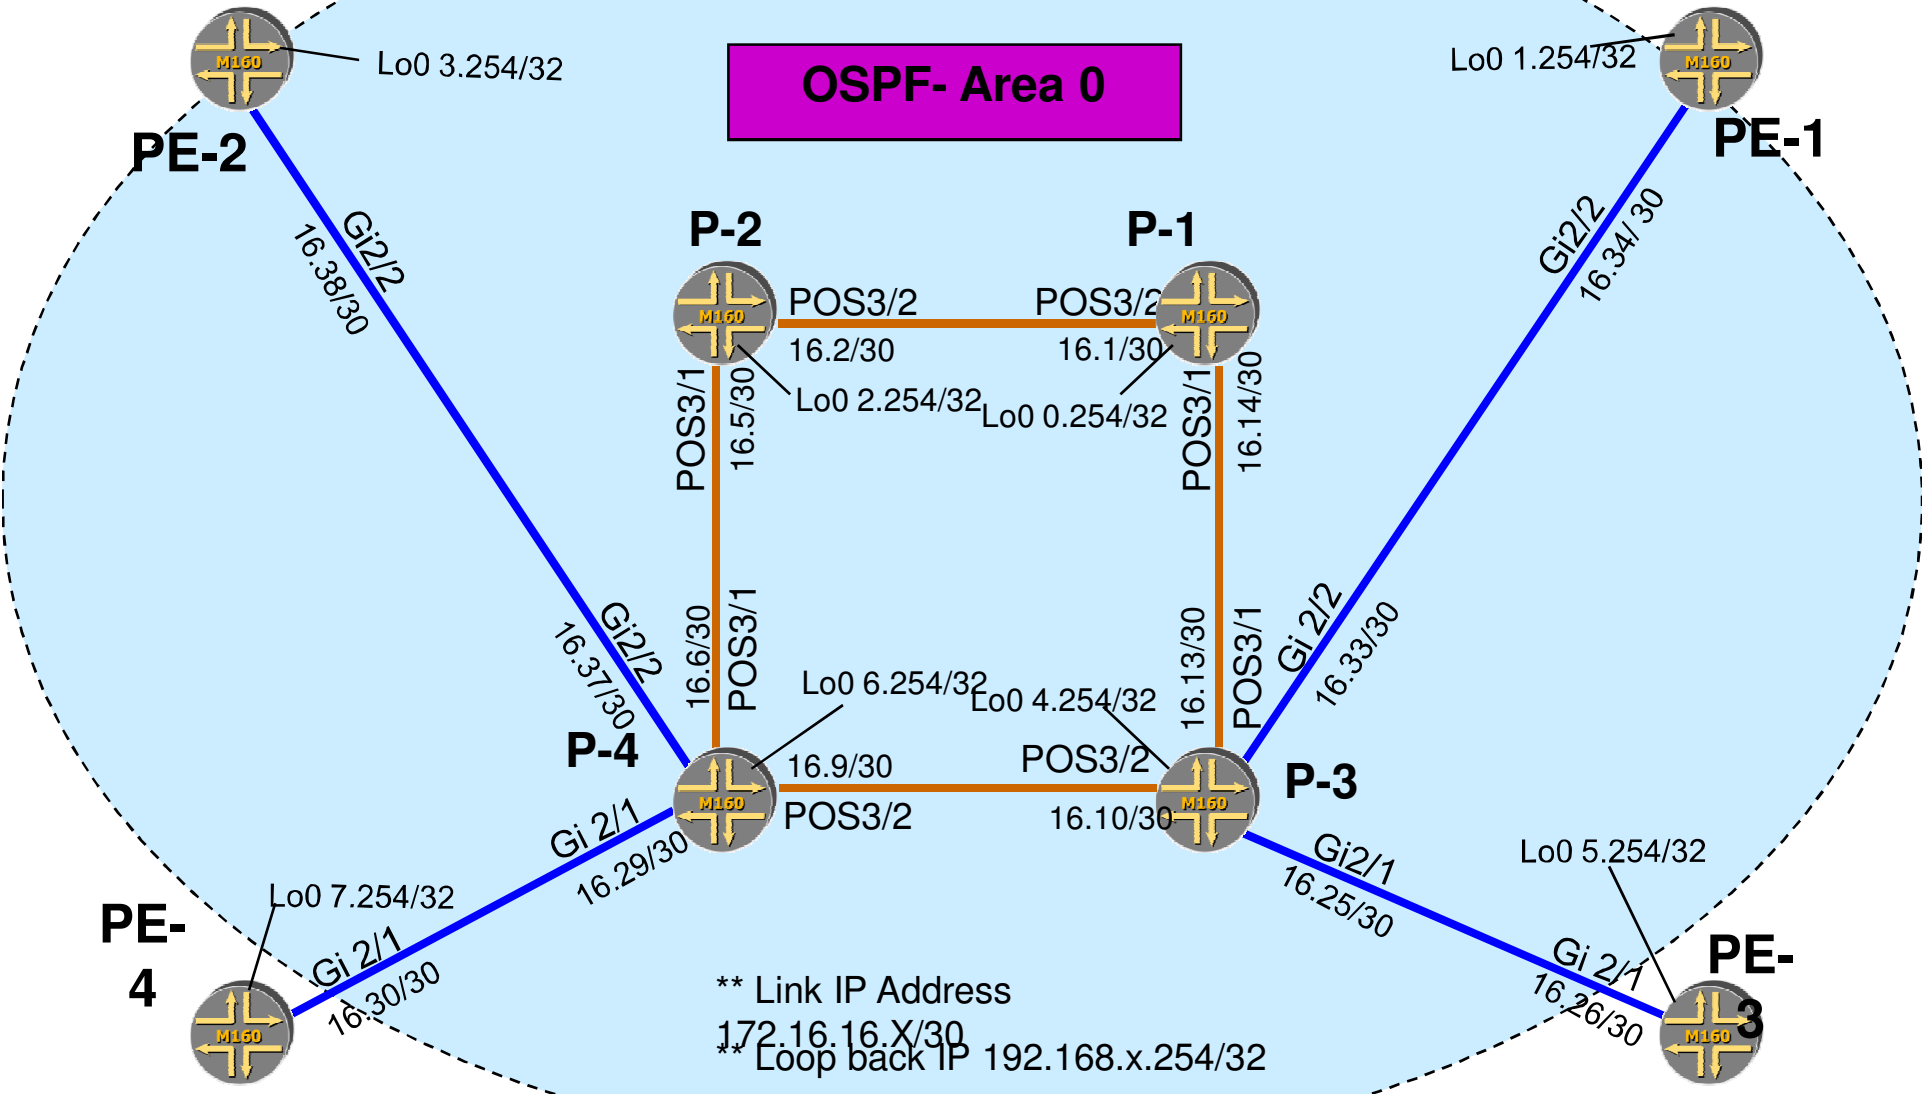

** Link IP Address
172.16.16.X/30
** Loop back IP 192.168.x.254/32

MPLS Domain

For internal circulation of BSNL only

